


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked	RoHS Compliant.					
V1.0	Sketch only	15/01/2025									

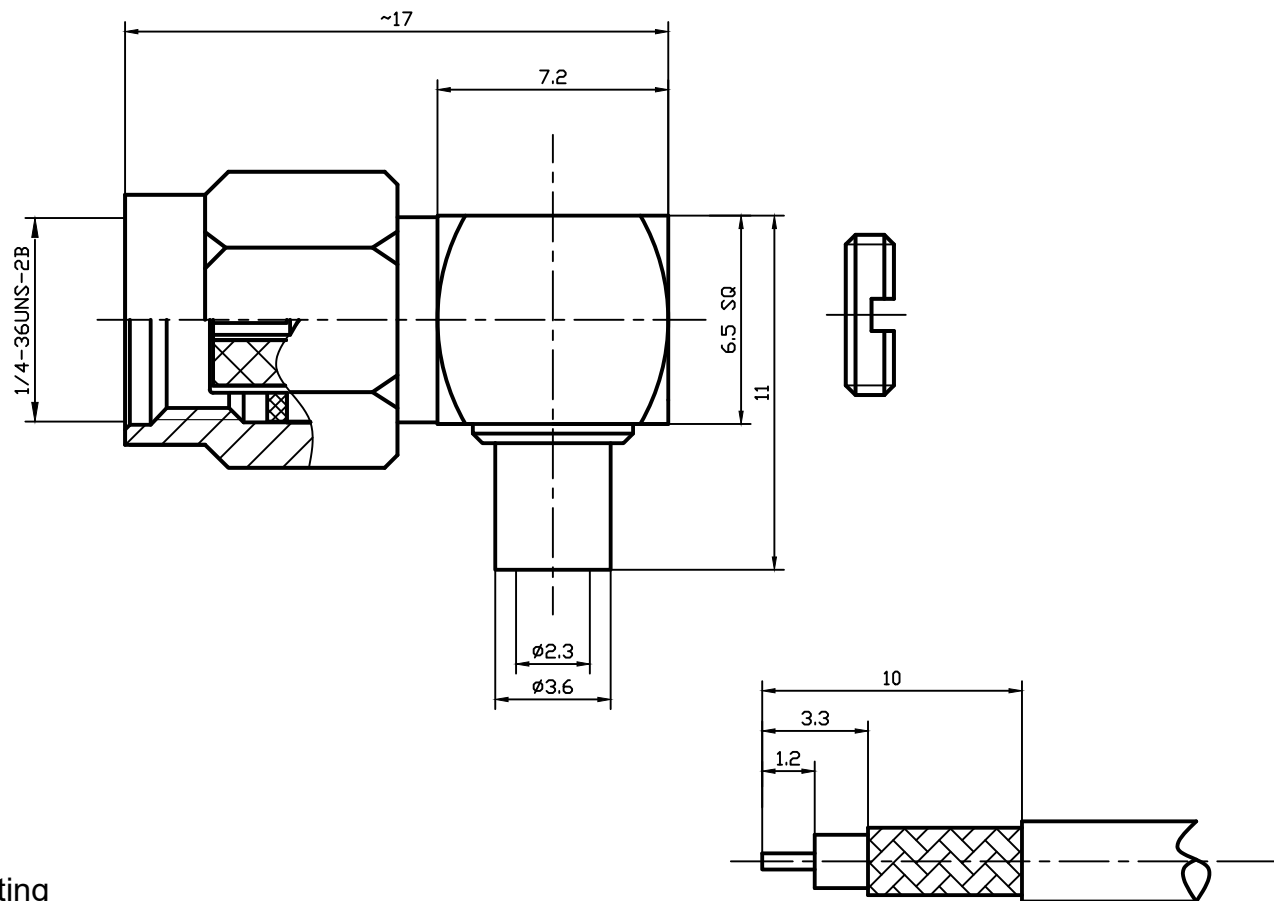

Interface Per: MIL-STD-348, IEC 60169-15
Cable Type: RG405

Material & Finishing:

1. Center condutor: Phosphor bronze, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Gold Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~3GHz
3. VSWR: 1.25 Max,
5. Dielectric Withstanding voltage:750V Min
6. Voltage Rating : 350V Max

Suggested stripping

Unless otherwise specified, tolerances as below: .X ±0.15 .XX ±0.1 .XXX ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.01.428
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: RP SMA RA PLUG FOR RG405 CABLE			
Approved		DATA:				