

RoHS Compliant.

RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	20/01/2025		

Interface Per: MIL-STD-348, IEC 60169-15
Cable Type: LMR400

Material & Finishing:


- Center conductor: Brass, Gold Plating
- Insulators: PTFE
- Body : Brass, Ternary Alloy Plating
- Other Metal Parts: Brass, Ternary Alloy Plating
- Gasket: Silicone Rubber, Color Black

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~6GHz
- VSWR: $\leq 1.15 @ 900\text{MHz}$,
 $\leq 1.2 @ 1800\text{MHz}$,
 $\leq 1.25 @ 3000\text{MHz}$,
 $\leq 1.5 @ 6000\text{MHz}$,
- Insertion loss: $\leq 0.05\text{dB} @ 900\text{MHz}$,
 $\leq 0.05\text{dB} @ 1800\text{MHz}$,
 $\leq 0.05\text{dB} @ 3000\text{MHz}$,
 $\leq 0.1\text{dB} @ 6000\text{MHz}$,
- Dielectric Withstanding voltage: 2500V Min
- Voltage Rating : 1400V Max

Package : 1 PC per bag

Laser Mark: LenoRF

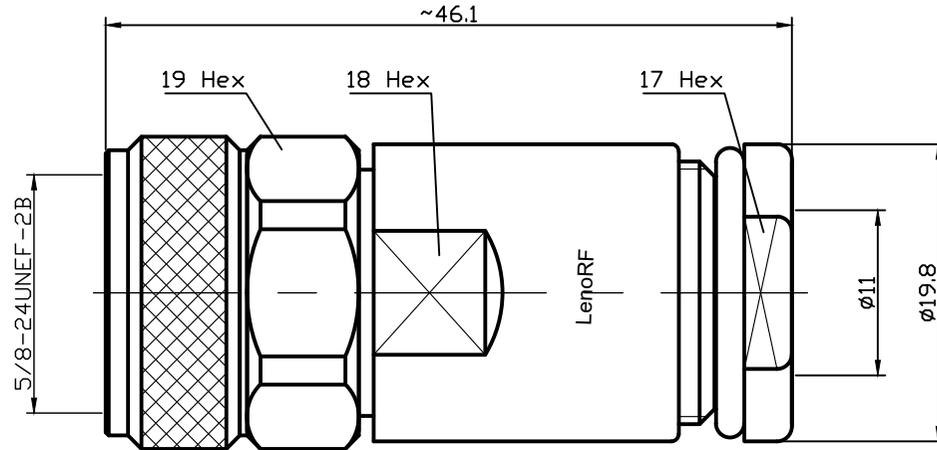

Two Pins
两个针

Label Content:

LenoRF
Part No: 3.04.0281
Part Name: N PLUG FOR LMR400 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g	
	Finish:	See Notes	Scale	8 : 1	
	Unit	mm	Page	01	
	REV.	V1.0	p/n	01	
Drawn	DATA:	Projection		Cust P/N.	TBD
Checked	DATA:	Title:	N PLUG FOR LMR400 CABLE		
Approved	DATA:				

