


A		B		C	
RevNo	Revision note	Date		Signature	Checked
V1.0	Sketch only	25/10/2025			

RoHS Compliant.

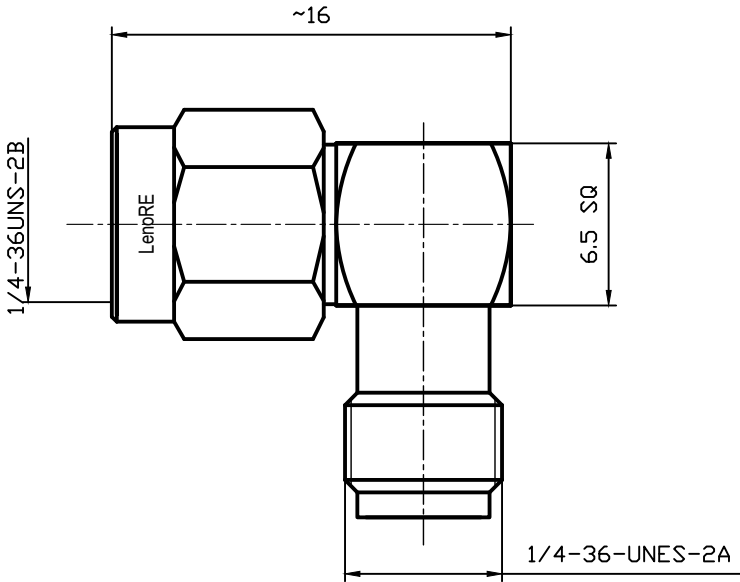

Interface Per: MIL-STD-348,

Material & Finishing:

- 1. Center conductor: Brass, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Gold Plating

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR: ≤1.1 @ 900MHz,
 ≤1.15@ 1800MHz,
 ≤1.2 @ 3000MHz,
 ≤1.25 @ 6000MHz
- 5. Insertion loss: ≤0.05dB @ 900MHz,
 ≤0.05dB @ 1800MHz,
 ≤0.05dB @ 3000MHz,
 ≤0.1dB @ 6000MHz,
- 7. Proof Voltage : 500 Veff
- 8. Working voltage: 350 Veff

Package : 1 PC per bag

Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.17.168
Part Name: SMA PLUG RA TO SMA JACK FLANGED MOUNTING ADAPTOR
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.168
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA PLUG RA TO SMA JACK FLANGED MOUNTING ADAPTOR			
Approved		DATA:				