


RoHS Compliant.

RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	31/01/2026		

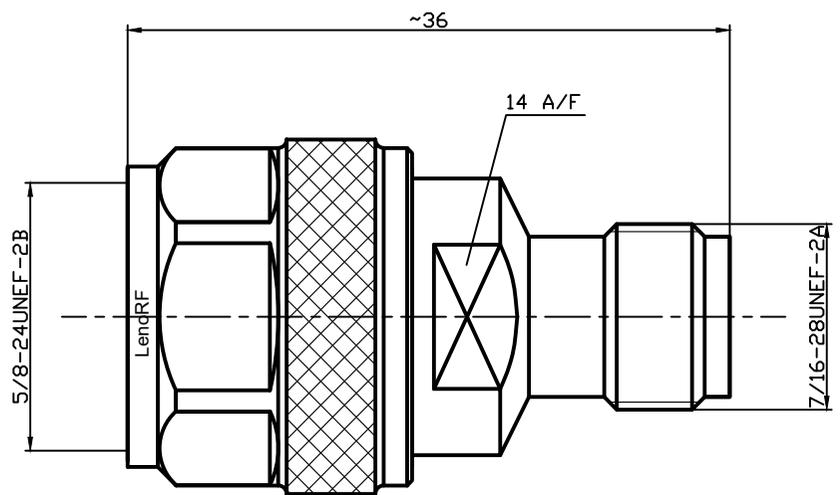

**Interface Per:** MIL-STD-348,

**Material & Finishing:**

1. Center condutor: Phosphor bronze, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Nickel Plating

**Electrical Data:**

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR:  $\leq 1.05$  @ 900MHz,  
 $\leq 1.1$  @ 1800MHz,  
 $\leq 1.2$  @ 3000MHz,  
 $\leq 1.35$  @ 6000MHz
4. Insertion loss:  $\leq 0.05$ dB @ 900MHz,  
 $\leq 0.05$ dB @ 1800MHz,  
 $\leq 0.05$ dB @ 3000MHz,  
 $\leq 0.1$ dB @ 6000MHz,
5. Proof Voltage : 750 Veff
6. Working voltage: 350 Veff

**Package :** 1 PC per bag

**Laser Mark:** LenoRF

**Label Content:**

LenoRF  
 Part No: 3.17.187  
 Part Name: N PLUG TO TNC JACK ADAPTER  
 QTY: 1 PC  
 Date: WW/YY (Week/year)

Unless otherwise specified tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g	
	Finish:	See Notes	Scale	3 : 1	
	Unit	mm	Page	01	
	REV.	V1.0	p/n	01	
Drawn	DATA:	Projection		Cust P/N.	TBD
Checked	DATA:	Title: N PLUG TO TNC JACK ADAPTER			
Approved	DATA:				

4  
3  
2  
1

4  
3  
2  
1

A B C D E F