


A		B		C		D		E		F	
RevNo	Revision note		Date	Signature	Checked	RoHS Compliant.					
V1.0	Sketch only		21/10/2025								

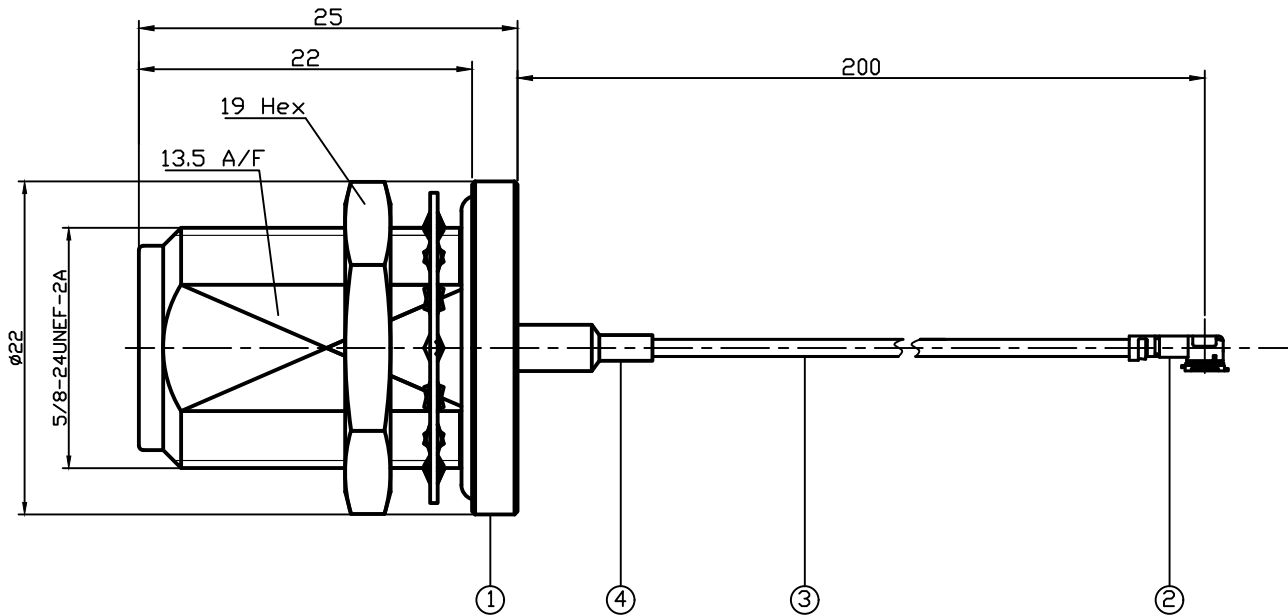

- 1. N jack connector
- 2. IPEX 4 connector
- 3. 1.37 cable
- 4. Heat shrink tubing Black

Material & Finishing:

- N jack connector
- 1. Center condutor: Brass, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Nickel Plating
- 4. Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~3GHz
- 3. VSWR: 1.4 Max
- 4. Dielectric Withstanding voltage:200v Min
- 5. Voltage Rating : 60v Max

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.19.198
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: N JACK TO IPEX 4 FOR 1.37 CABLE 200mm			
Approved		DATA:				