


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked	RoHS Compliant.					
V1.0	Sketch only	15/10/2025									

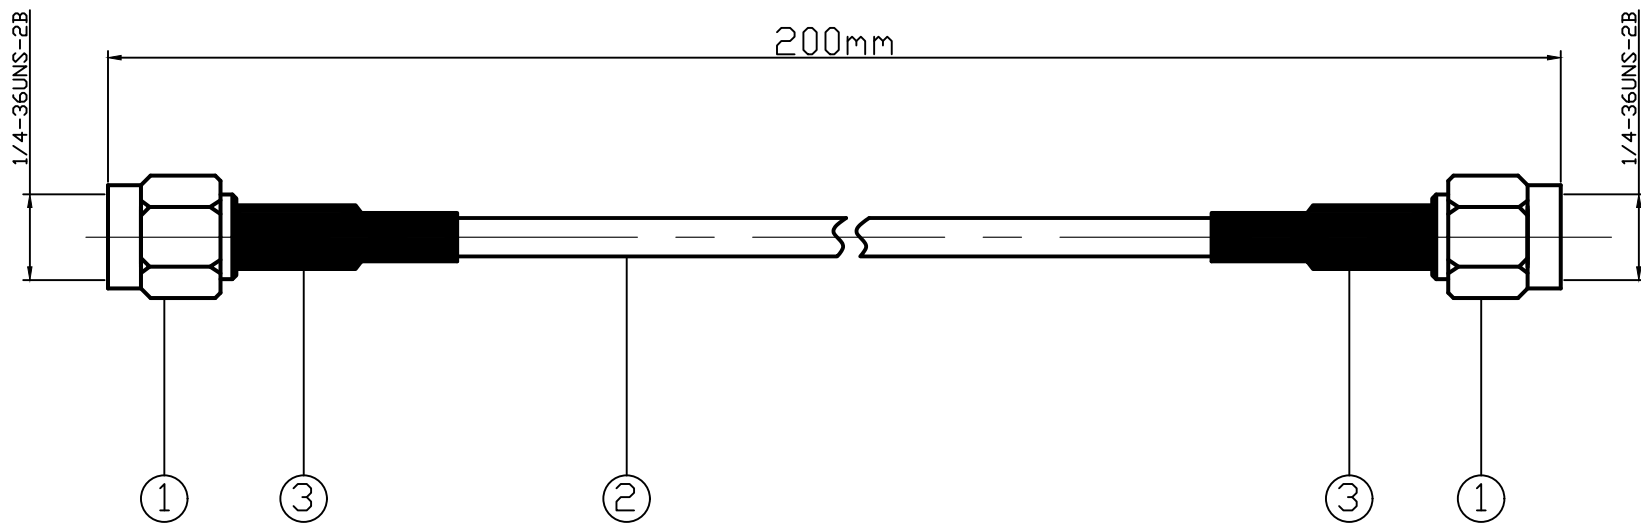

- 1. SMA PLUG connector
- 2. RG316 cable
- 3. Heat shrink tube(black)


Material & Finishing:

- SMA PLUG connector
- 1. Center Conductor: Brass, Gold Plating
- 2. Insulators: PTFE
- 3. Body: Brass, Gold Plating
- 4. Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~3GHz
- 3. V.S.W.R:≤ 1.35
- 4. Dielectric Withstanding voltage:750v Min
- 5. Voltage Rating : 350v Max

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.19.200
Drawn	DATA:		Projection		Cust P/N.	TBD
Checked	DATA:		Title: SMA PLUG TO SMA PLUG FOR RG316 CABLE 200mm			
Approved	DATA:					