


A		B	C		D	E	F
RevNo	Revision note	Date	Signature	Checked	RoHS Compliant.		
V1.0	Sketch only	18/06/2026					

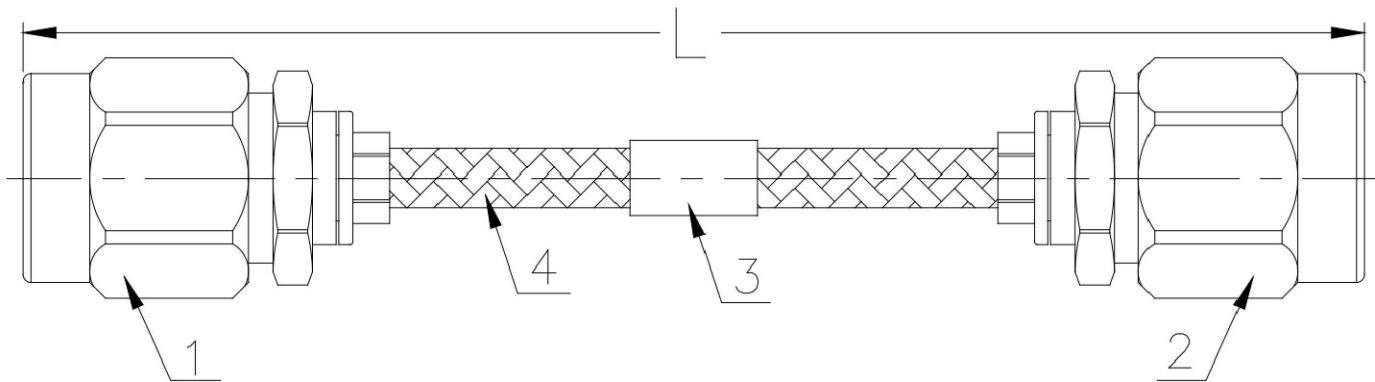

- 1. 2.92 PLUG connector
- 2. 2.92 PLUG connector
- 3. Label (Optional)
- 4. ZR086(Blue FEP Jacket)

Material & Finishing:

- 2.92 PLUG connector
- 1. Center Conductor: Brass, Gold Plating 0.1um
- 2. Insulators: PTFE
- 3. Body: Brass, Gold Plating 0.1um
- 4. Nut : Stainless steel, Passivated

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~35GHz
- 3. V.S.W.R:≤ 1.22
- 4. Insertion Loss: ≤ 1.0 dB 90mm, ≤ 1.1 dB 115 mm, ≤ 1.40 dB 170mm
- 5. Dielectric Withstanding voltage:750v Min
- 6. Voltage Rating : 500v Max

CODE	L<mm>	CUSTOMER CODE
3.19.604-90mm	90mm	TBD
3.19.604-115mm	115mm	TBD
3.19.604-170mm	170mm	TBD

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.19.604-Xmm
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: 2.92 PLUG TO 2.92 PLUG FOR ZR086 CABLE Xmm			
Approved		DATA:				